



Sタイプ

擁壁天端に縦断勾配がある場合は、Sタイプで計画して下さい。

側面図

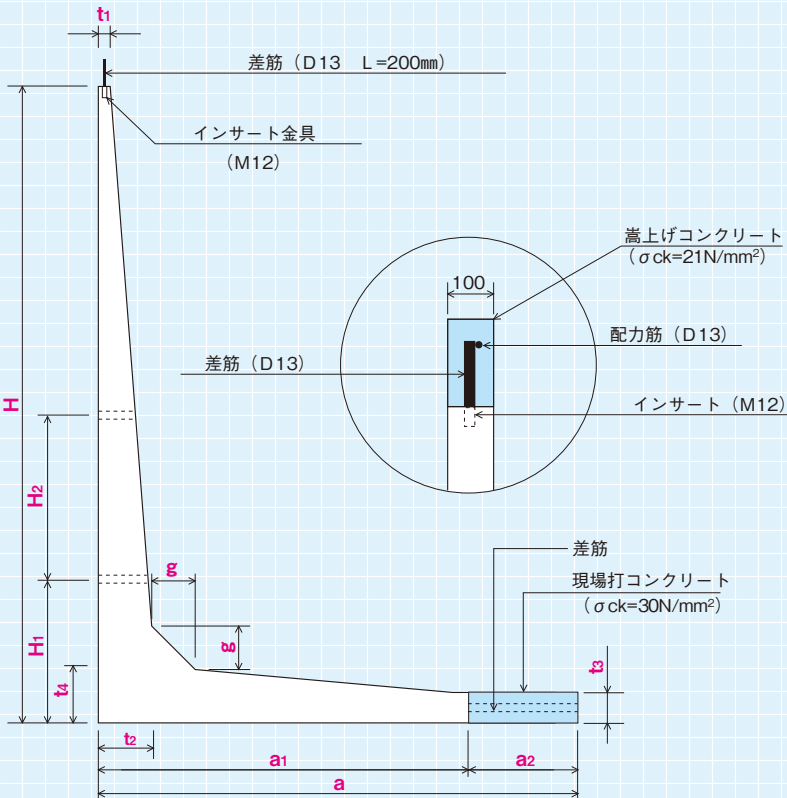

正面図

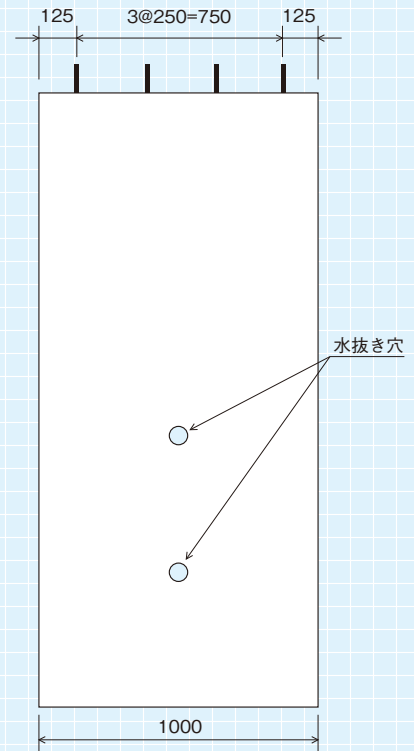

●継ぎ足し部数量 (10m当り)

呼び名	鉄筋 (D13)	生コン (m ³)	型枠 (m ²)
3750S	6本、59.7kg	1.26	2.0
4000S			
4250S			
4500S			
4750S	8本、79.6kg	1.46	2.0
5000S			

●現場打部寸法表 (10m当り)

呼び名	a ₂	底版上側鉄筋	底版下側鉄筋
3750S	630	D13 @ 150	D13 @ 150
4000S			
4250S	630	D16 @ 200	D13 @ 200
4500S			
4750S	730	D16 @ 150	D13 @ 150
5000S			

●寸法表

呼び名	H	a	a ₁	t ₁	t ₂	t ₃	t ₄	g	H ₁	H ₂	L	参考重量 (kg)
3250S	3000	2340	-	100	250	80	250	230	1000	1000	2000	4500
3500S	3250											4620
3750S	3500	2630	2000	100	300	200	300	250	1000	1000	1000	2890
4000S	3750											2950
4250S	4000	2930	2300	100	340	200	340	280	1000	1000	1000	3645
4500S	4250											3705
4750S	4500	3230	2500	100	380	200	380	300	1000	1000	1000	4405
5000S	4750											4465