



高強度コンクリートを用いた上下2分割ボックスカルバートです。

正面図

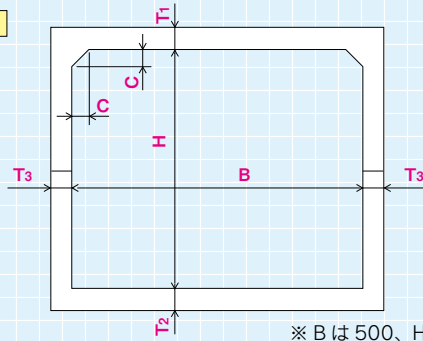

側面図



※ B は 500、H は 100 ピッチで製作可能です。

●寸法表

土被り	呼び名 (B × H)	製品寸法 (mm)					セット質量 (t/2.0m)	
		T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	C	L		
1.0 m	4000 ×	3000	300	300	300	300	2000	22.80
		4000						25.80
		5000						29.80
	5000 ×	3000	300	350	300	300	2000	27.20
		4000						30.20
		5000						33.00
	6000 ×	3000	350	400	300	300	2000	33.60
		4000						36.60
		5000						39.40
	7000 ×	3000	400	450	400	350	1495	33.52
		4000						36.45
		5000						39.38
8000 ×	3000	500	550	400	350	1500	43.08	
	4000						42.79	
	5000	450	500	400	350	1500	45.72	
	3000						25.20	
	4000						28.00	
	5000						35.00	
2.0m	4000 ×	3000	350	350	300	300	2000	31.80
		4000						35.20
		5000						38.60
	5000 ×	3000	350	400	350	300	2000	40.40
		4000						43.80
		5000						50.20
	6000 ×	3000	400	500	350	300	2000	44.02
		4000						47.31
		5000						52.72
	7000 ×	3000	500	550	450	350	1500	49.49
		4000						52.79
		5000						59.99
8000 ×	3000	600	700	450	350	1500	49.60	
	4000						52.79	
	5000	500	600	450	350	1500	26.20	
	3000						29.20	
	4000						35.00	
	5000						36.00	
3.0m	4000 ×	3000	350	300	400	300	2000	39.40
		4000						42.80
		5000						45.60
	5000 ×	3000	400	500	350	300	2000	49.60
		4000						53.40
		5000						46.60
	6000 ×	3000	450	550	400	300	2000	50.26
		4000						53.92
		5000						43.84
	7000 ×	3000	550	650	500	350	1500	39.86
		4000						42.54
		5000						43.84
8000 ×	3000	750	850	550	350	1000	39.86	
	4000						42.54	
	5000						43.84	

※ L 寸法は有効長であり、実寸法は - 5mm を考慮した長さになります。

## 施工手順



1 下部工据付



2 上部工据付



3 完成