



側溝類

管渠・暗渠類

カルバート類

道路類

残存型枠・シートライニング

擁壁類

L型擁壁類

水路類


河川類

機能性
コンクリート

その他


H=600~900

正面図

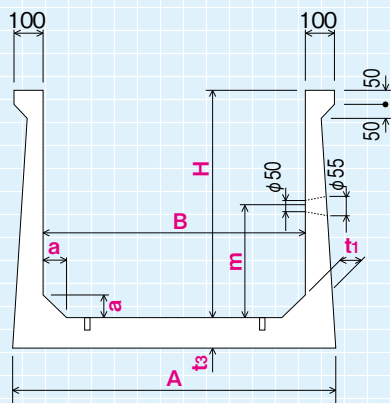

H=1000~1500

正面図

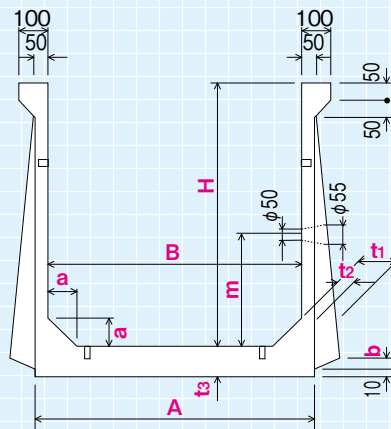

PRODUCT

三面水路




●寸法表

(単位: mm)

呼び名 (B × H)	B	H	A	t ₁	t ₂	t ₃	a	b	L	m	参考質量 (kg)
600	600		730								620
800	800		930								685
900 × 600	900	600	1030	65	-	70	60	-	2000	300	720
1000	1000		1130								755
1200	1200		1330								820
600	600		740								735
700	700		840								775
800 × 700	800	700	940	70	-	80	70	-	2000	350	815
1000	1000		1140								895
1200	1200		1340								975
600	600		740								795
800	800		940								870
1000 × 800	1000	800	1140	70	-	80	80	-	2000	400	950
1200	1200		1340								1025
600	600		750								915
800	800		950								1005
900 × 900	900	900	1050	75	-	90	90	-	2000	450	1050
1000	1000		1150								1090
1200	1200		1350								1175
600	600		700								955
800	800		900								1050
1000 × 1000	1000	1000	1100	130	50	100	100	50	2000	500	1145
1200	1200		1300								1240
1500	1500		1600								1385
800	800		900								1375
1000 × 1200	1000	1200	1100	160	50	120	120	70	2000	600	1490
1200	1200		1300								1585
1500	1500		1600								1760
1000	1000		1120								1960
1200 × 1500	1200	1500	1320	190	60	150	150	90	2000	750	2105
1500	1500		1620								2345

※その他のサイズは別途ご用命ください。

標準施工図

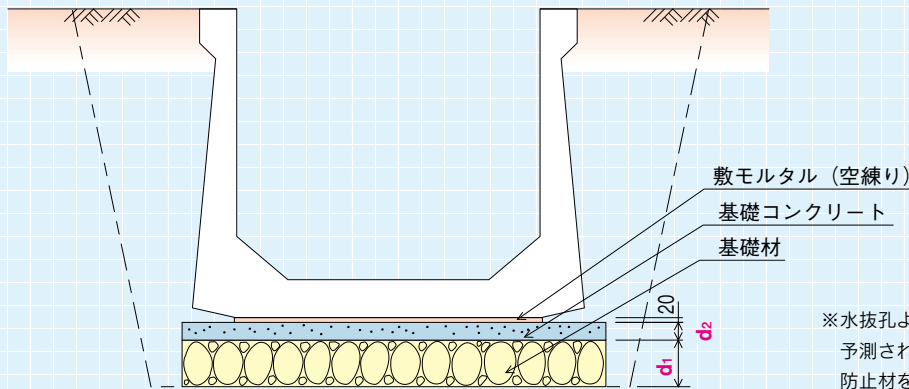


●基礎数量及び参考歩掛表

(10m 当り)

呼び名 (B × H)	製品本数	敷 モルタル (m ³)	基礎コンクリート			基礎材		据付工				
			d ₂ (mm)	幅 (mm)	(m ³)	d ₁ (mm)	幅 (mm)	(m ²)	世話役 (人)	特殊 作業員 (人)	普通 作業員 (人)	クレーン (4.8~4.9t吊) (日)
600	5	0.15	50	930	0.465	100	930	9.3	0.20	0.20	0.80	0.20
800		0.19		1130	0.565		1130	11.3				
900 × 600		0.21		1230	0.615		1230	12.3				
1000		0.23		1330	0.665		1330	13.3				
1200		0.27		1530	0.765		1530	15.3				
600	5	0.15	50	940	0.470	100	940	9.4	0.20	0.20	0.80	0.20
700		0.17		1040	0.520		1040	10.4				
800 × 700		0.19		1140	0.570		1140	11.4				
1000		0.23		1340	0.670		1340	13.4				
1200		0.27		1540	0.770		1540	15.4				
600	5	0.15	50	940	0.470	100	940	9.4	0.20	0.20	0.80	0.20
800		0.19		1140	0.570		1140	11.4				
1000 × 800		0.23		1340	0.670		1340	13.4				
1200		0.27		1540	0.770		1540	15.4				
600		5		0.15	50		950	0.475				
800	0.19		1150	0.575		1150	11.5					
900 × 900	0.21		1250	0.625		1250	12.5					
1000	0.23		1350	0.675		1350	13.5					
1200	0.27		1550	0.775		1550	15.5					
600	5	0.14	50	900	0.450	100	900	9.0	0.20	0.20	0.80	0.20
800		0.18		1100	0.550		1100	11.0				
1000 × 1000		0.22		1300	0.650		1300	13.0				
1200		0.26		1500	0.750		1500	15.0				
1500		0.32		1800	0.900		1800	18.0				
800	5	0.18	50	1100	0.550	150	1100	11.0	0.30	0.30	1.10	0.30
1000 × 1200		0.22		1300	0.650		1300	13.0				
1200		0.26		1500	0.750		1500	15.0				
1500		0.32		1800	0.900		1800	18.0				
1000		0.22		1320	0.660		1320	13.2				
1200 × 1500	0.26	1520	0.760	1520	15.2							
1500	0.32	1820	0.910	1820	18.2							
1200 × 1500	5	0.26	50	1520	0.760	150	1520	15.2	0.40	0.40	1.10	0.40
1500	0.32	1820	0.910	1820	18.2	150	1820	18.2	0.40	0.40	1.10	0.40

注) 本表は参考資料であり、現場の状況に応じて適宜変更して下さい。

三面水路専用スラブ(T-4)

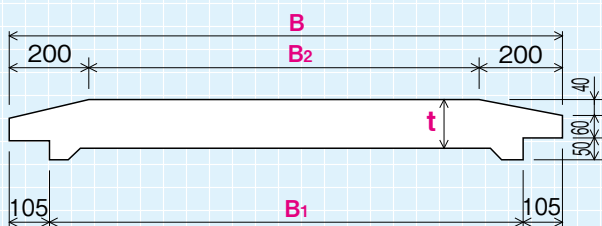

●寸法表

(単位: mm)

水路幅	B	B ₁	B ₂	t	L	参考質量 (kg)
600用	800	590	400	100	1000	190
700用	900	690	500			215
800用	1000	790	600			235
900用	1100	890	700			260
1000用	1200	990	800			280
1200用	1400	1190	1000	120	1000	355
1500用	1700	1490	1300			465
1800用	2000	1790	1600			590
2000用	2200	1990	1800			695
2000用	2200	1990	1800			140